

BXA W165 S3.1

BOXMORE

BLOX

Blox Advanced 165 mm 3 ohm midbass speaker


SPECIFICATIONS

Power Handling	120	W RMS
Impedance	3	Ohm
Sensitivity (2,83V/1m)	92,0	dB
VC diameter	35	mm
VC wire	CCAW	
VC former	Aluminium	



T/S PARAMETER

Fs	54,9	Hz
Vas	13,07	L
Qms	2,38	
Qes	0,56	
Qts	0,45	
Re	3,04	Ohm
Sd	118,2	cm ²
Mms	12,60	g
Cms	0,67	mm/N
Bl	4,86	Tm
Xmax (+/-)	3,6	mm

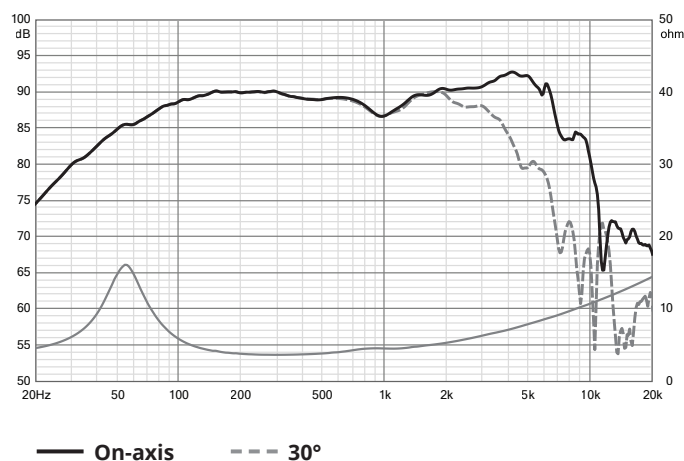

- » 35 mm CCAW voice coil on aluminium former with aluminium shorting ring
- » Curvilinear, semi-pressed paper cone
- » Aluminium phase plug

- » Intelligent Blox connector system
- » Frequency response optimised for off-axis linearity

