

BXA M50 S3.1


Blox Advanced 50mm full-range speaker

SPECIFICATIONS

Power Handling	25	W RMS
Impedance	3	Ohm
Sensitivity (2,83V/1m)	87,7	dB
VC diameter	20	mm
VC wire	CCAW	
VC former	Kapton	

T/S PARAMETER

Fs	240,4	Hz
Vas	0,11	L
Qms	3,84	
Qes	1,03	
Qts	0,81	
Re	3,10	Ohm
Sd	19,9	cm ²
Mms	2,07	g
Cms	0,21	mm/N
Bl	3,08	Tm
Xmax (+/-)	2	mm

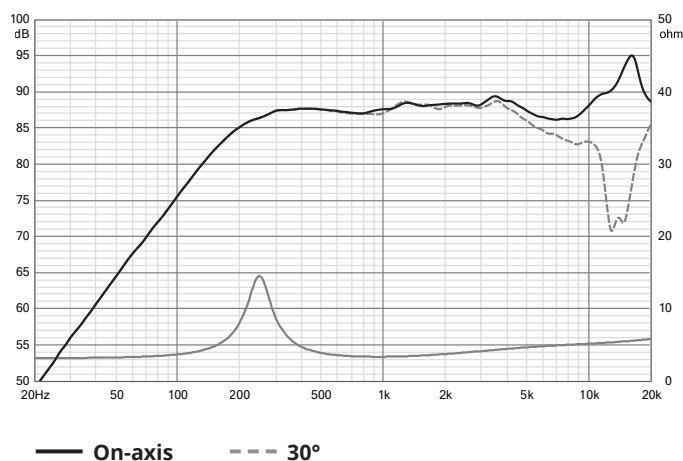

- » Patented twist-lock mounting system
- » Wide frequency range for full range applications
- » Symmetric drive magnet system with dual neodymium magnets

- » Non-magnetic reinforced polymer composite basket
- » Versatile adapter mounting system and protective grille included

