

BXA M80 S3.1


Blox Advanced 80mm midrange speaker

SPECIFICATIONS

Power Handling	25	W RMS
Impedance	3	Ohm
Sensitivity (2,83V/1m)	90,7	dB
VC diameter	20	mm
VC wire	CCAW	
VC former	Kapton	

T/S PARAMETER

Fs	156,0	Hz
Vas	0,60	L
Qms	3,71	
Qes	0,77	
Qts	0,64	
Re	3,15	Ohm
Sd	34,7	cm ²
Mms	2,94	g
Cms	0,35	mm/N
Bl	3,44	Tm
Xmax (+/-)	2	mm

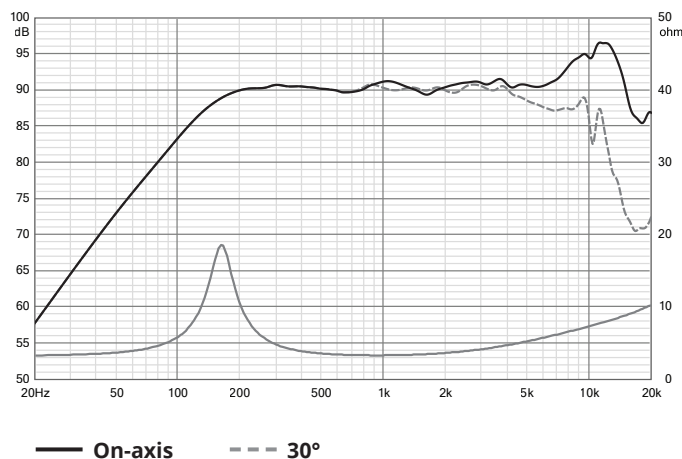

- » Patented twist-lock mounting system
- » Patent pending hybrid connector system
- » Symmetric drive magnet system with dual neodymium magnets

- » Non-magnetic reinforced polymer composite basket
- » Versatile adapter mounting system and protective grille included

