

BXA T25.1

BOXMORE

BLOX


Blox Advanced 25mm ceramic coated aluminum dome tweeter

SPECIFICATIONS

Power Handling		W RMS
Impedance	3	Ohm
Sensitivity (2,83V/1m)	94,2	dB
VC diameter	25	mm
VC wire	CCAW	
VC former	Aluminium	

T/S PARAMETER

Fs	1800,0	Hz
Vas		L
Qms	1,69	
Qes	1,92	
Qts	0,90	
Re	3,18	Ohm
Sd	7,1	cm ²
Mms	0,25	g
Cms	0,03	mm/N
Bl	2,17	Tm
Xmax (+/-)		mm

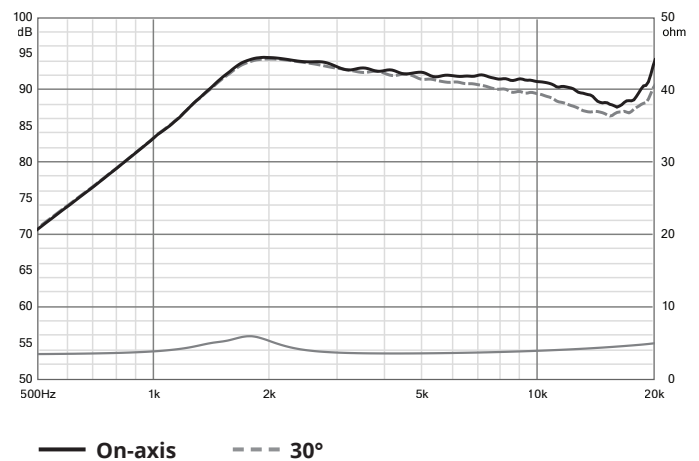

- » Ceramic coated aluminum dome for excellent off-axis frequency response
- » Powerful neodymium motor
- » Minimum crossover cut-off frequency: 2,7 KHz - 12 dB/oct

- » Cable with 2-PIN OEM male and female connector for secure disassembly
- » Snap-fit mounting system allows for perfect integration when combined with the appropriate adapter ring (sold separately)

